

Next Bridge

Hard Stone Tiles
Industry Corporation

NBEC

INNOVATIVE PRODUCTS
FOR ARCHITECTURE AND
INTERIOR DESIGN

HardStone




COMBINE TECHNOLOGY & ART



MAGMA DESIGN



40 X 40 CM.

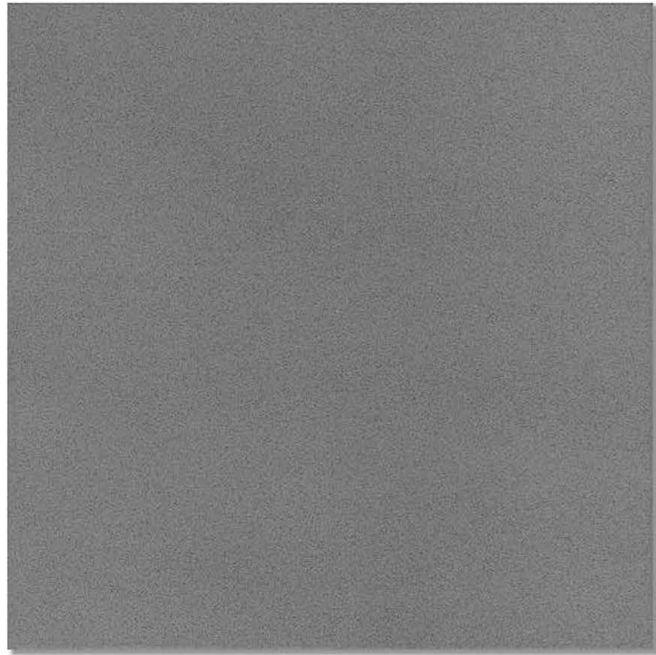


■ Magma Dark Gray



MAGMA DESIGN



40 X 40 CM.

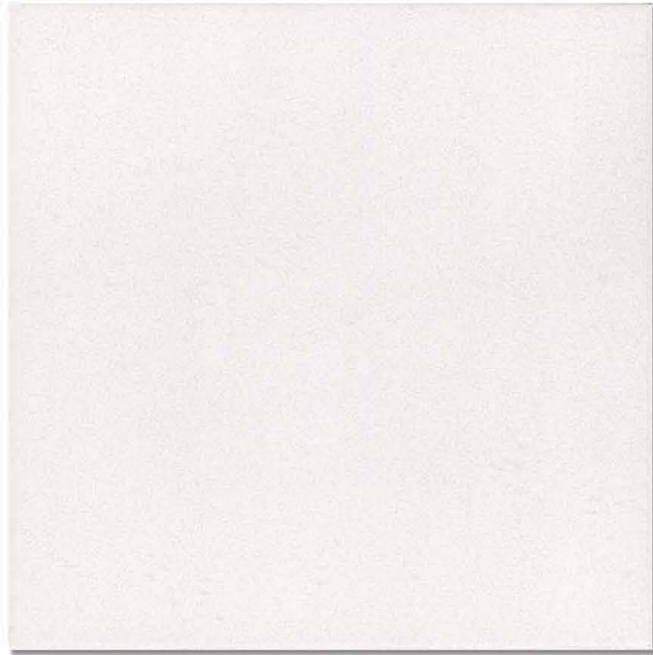

■ Magma Ivory



ARAGONIT DESIGN



40 X 40 CM.



■ Aragonit Rustic



SAHAND DESIGN



40 X 40 CM.



■ Sahand Ivory



MOSAICO DESIGN

P 2 D

40 X 40 CM.



■ Mosaico Design



FLORENCE DESIGN



40 X 40 CM.



■ Florence Collection


12 Faces





VALENCIA DESIGN



40 X 40 CM.

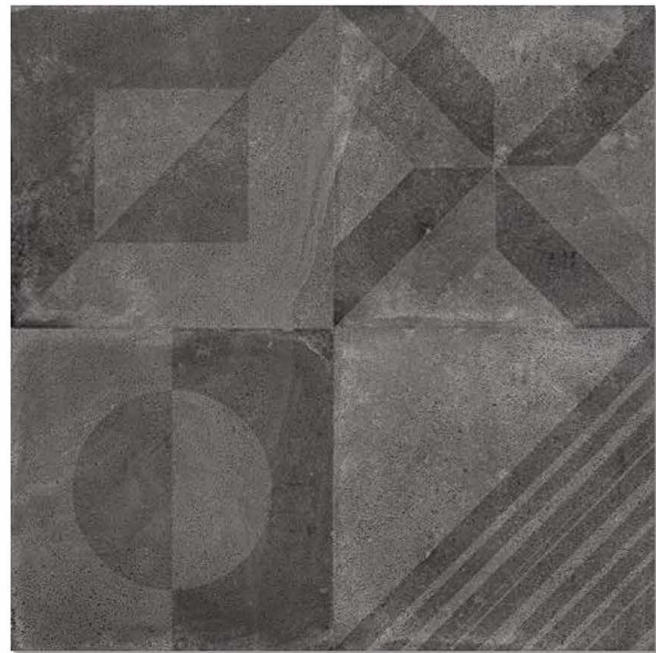

■ Valencia Collection

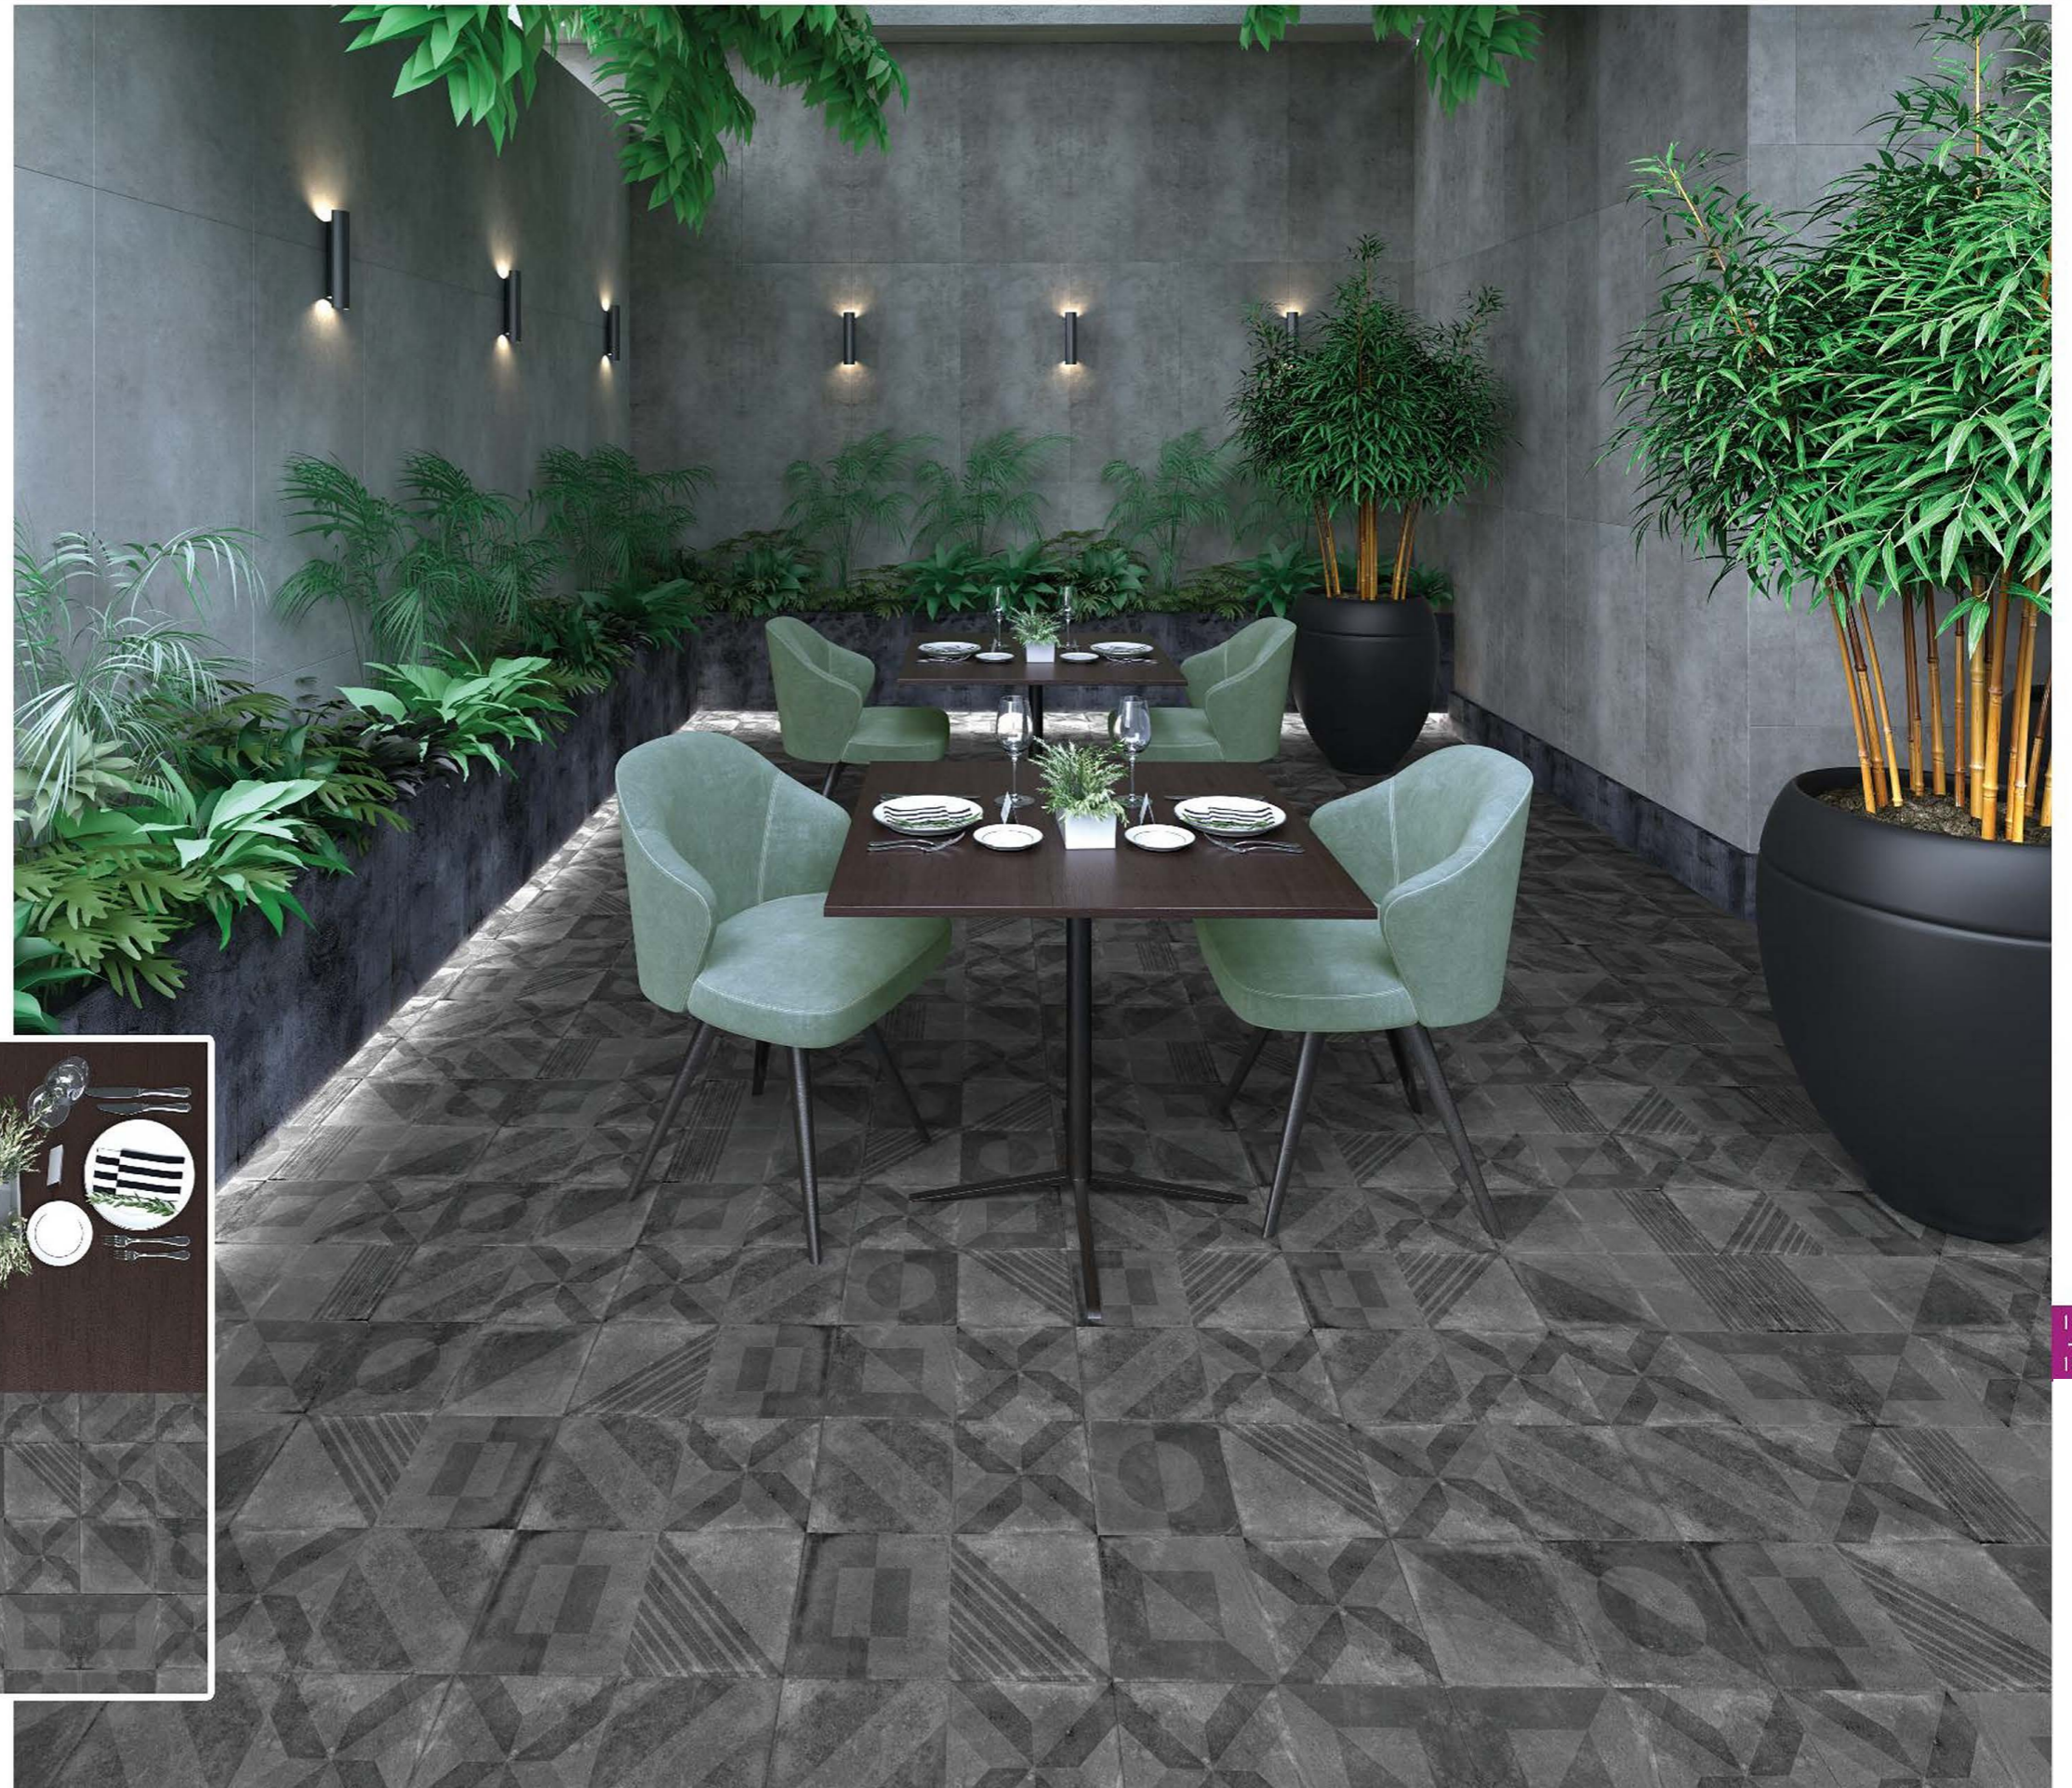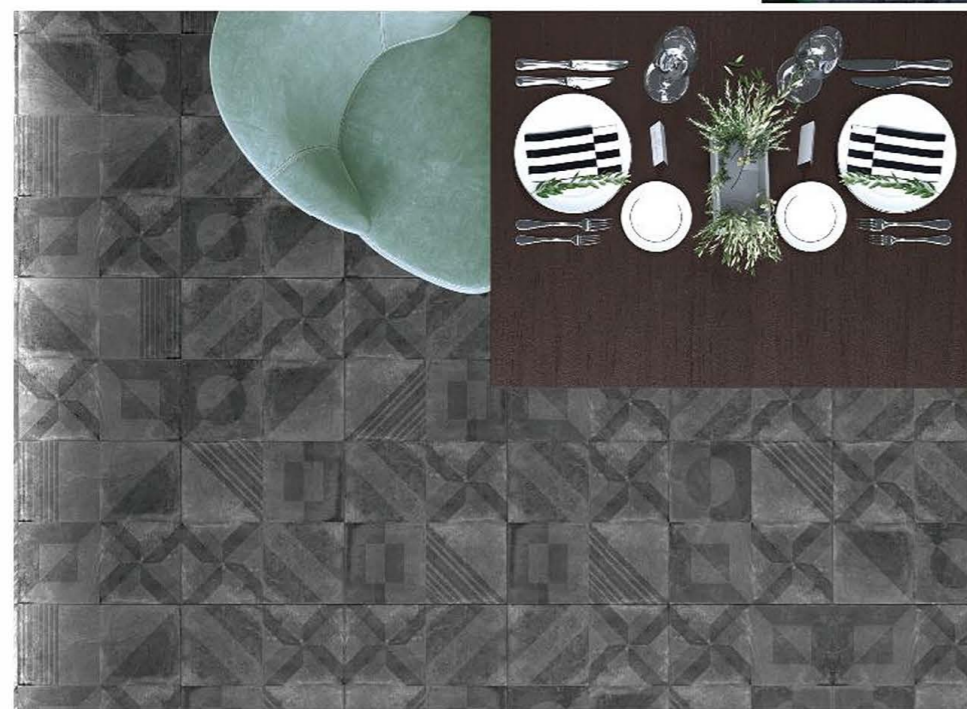


HERO DESIGN

P   2  40 X 40 CM.



■ Hero Light Rustic

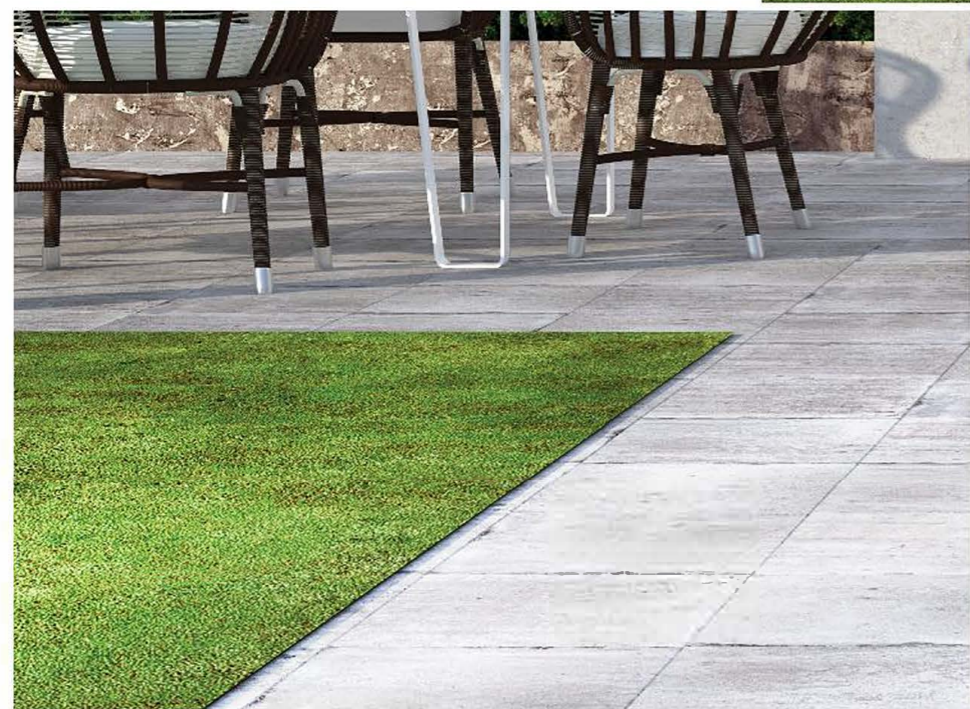


FUSION DESIGN



40 X 40 CM.




■ Fusion Collection

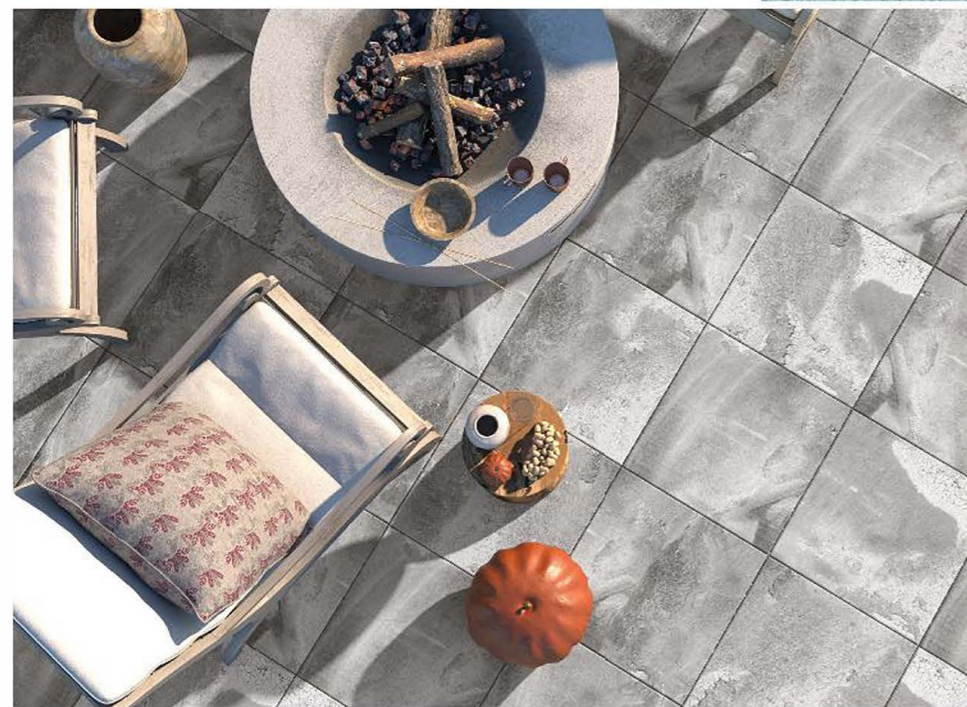

TILE COLLECTION


NEW PRODUCT

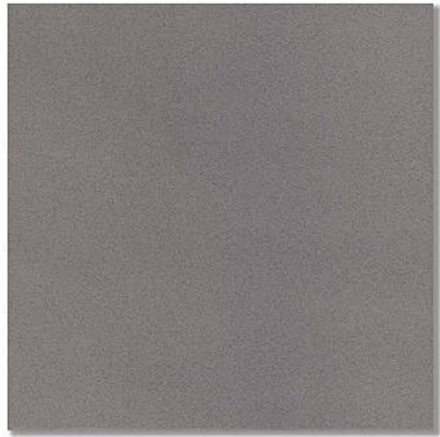

■ Magma Dark Gray



■ Magma Light Gray

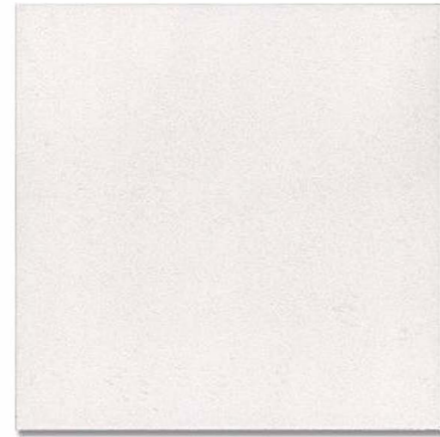

■ Magma Rustic Ivory



■ Magma Rustic Dark Gray




■ Magma Rustic Light Gray




■ Hero Rustic Dark



■ Hero Rustic Light



■ Sahand Ivory

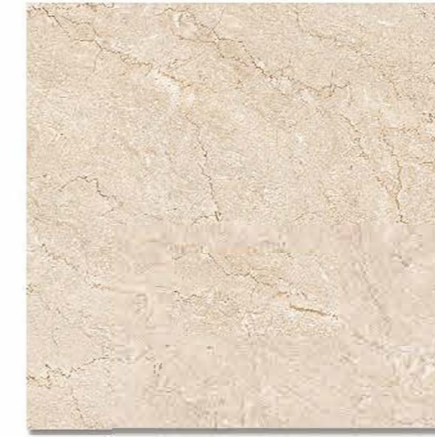

■ Sahand Beige



■ Mosaico Design



■ Valencia Black



■ Fusion Design



■ Aragonit Rustic



Table of technical specifications of glazed porcelain tile products, size 40 * 40, Goldis Tile factory				
Physical and chemical properties	Test standard	Required standard		Goldis tiles standards
Dimensions	10545-2	Length & Width(mm)	± 0.6 cm ²	± 0.5
		Thickness(mm)	± % 5	± 4 %
		Linearity	± % 0.2	± % 0.2
		Rectangularity	± % 0.2	±% 0.10
		Surface flatness	± % 0.3	± % 0.1
Water absorption , apparent porosity , Apparent relative Density and bulk density	10545-3	0 ≤ E ≤ 0.5		0 ≤ E ≤ 0.5
Breakage strength(N)	ISO 10545-4	Minimum 1300 N		1900 N
Modulus of rupture(N/mm ²)		Minimum 35 N/mm ²		55 N/mm ²
Linear thermal Expansion	ISO 10545-8	MAX ≤ 90*10 ⁻⁷		MAX ≤ 70*10 ⁻⁷
Crazing Resistance for Glazed tiles	ISO 10545-11	2hr , 5bar		2hr , 7bar
Resistance to chemical materials	ISO 10545-13	Min : Class B		Class B
Resistance to stains	ISO 10545-14	Min : Class 3		Class 3
Resistance To surface Abrasion for Glazed tiles	10545-7	Min : Class 1		Class 2
Surface resistance to scratching	EN 92	5		6

NEXT BRIDGE

Tile Industry Corporation

Follow Us

Web Address

<https://nextbridge-exports.com>

Instagram

nextbridge.exports

Email

nextbridge.co@gmail.com/